


OPERATING INSTRUCTIONS & PARTS MANUAL VENT-FREE PROPANE GAS HEATER

MODELS 2E783D & 3E467C


FORM 5S3075 03430 0893/227/VP

WARNING: READ INSTRUCTIONS CAREFULLY BEFORE ATTEMPTING TO INSTALL, ASSEMBLE, OPERATE OR SERVICE THE DAYTON VENT-FREE PROPANE GAS HEATER. IMPROPER INSTALLATION, ADJUSTMENT, ALTERATION, SERVICE OR MAINTENANCE COULD RESULT IN PERSONAL INJURY AND/OR PROPERTY DAMAGE. REFER TO THESE INSTRUCTIONS FOR CORRECT INSTALLATION AND OPERATIONAL PROCEDURES. FOR ASSISTANCE OR ADDITIONAL INFORMATION CONSULT A QUALIFIED INSTALLER, SERVICE AGENCY OR THE GAS SUPPLIER.

READ AND SAVE THESE INSTRUCTIONS



Both Models Shown with Optional Floor Mounting Stand



MODEL 3E467C

WARNING: If the information in this manual is not followed exactly, a fire or explosion may result causing property damage, personal injury, or loss of life.

- Do not store or use gasoline or other flammable vapors and liquids in the vicinity of this or any other appliance.
- WHAT TO DO IF YOU SMELL GAS
 - Do not try to light any appliance.
 - Do not touch any electrical switch; do not use any phone in your building.
 - Immediately call your gas supplier from a neighbor's phone. Follow the gas supplier's instructions.
 - If you cannot reach your gas supplier, call the fire department.
- Installation and service must be performed by a qualified installer, service agency, or the gas supplier.

WARNING: Improper installation, adjustment, alteration, service, or maintenance can cause injury or property damage. Refer to this manual for correct installation and operational procedures. For assistance or additional information consult a qualified installer, service agency, or the gas supplier.



Specifications

Unpacking

- Remove heater from carton.
- 2. Remove all protective packaging applied to heater for shipment.
- Check heater for any shipping damage. If heater is damaged, promptly inform dealer where you bought heater.

Local Codes

Install and use heater with care. Follow all local codes. In the absence of local codes, use the latest edition of The National Fuel Gas Code ANSI Z223.1 also known as NFPA 54*.

*Available from: American National Standards Institute, Inc. 1430 Broadway New York, NY 10018

National Fire Protection Association, Inc. Batterymarch Park Quincy, MA 02269

Installing To Wall

NOTICE

A qualified service person must install heater. Follow all local codes.

I. CHECK GAS TYPE

Use only propane gas. If your gas supply is not propane, do not install heater. Call dealer where you bought heater for proper type heater.

II. <u>INSTALLATION ITEMS</u>

Before installing heater, make sure you have the items listed below.

- external regulator (supplied by installer—see page 8)
- piping (check local codes)
- sealant (resistant to propane gas)
- manual shutoff valve *
- ground joint union
- test gauge connection * (see Figure 12, page 9)
- sediment trap
- · tee joint
- · pipe wrench
- * An A.G.A. design certified manual shutoff valve with 1/8" NPT tap is an acceptable alternative to test gauge connection.

III. LOCATING HEATER

This heater is designed to be mounted on a wall.

AWARNING

Maintain the minimum clearances shown in Figure 2 (page 5). If you can, provide greater clearances from floor, ceiling, and joining wall.

Cleaning and Maintenance

AWARNING

Turn off heater and let cool before cleaning.

A CAUTION

You must keep control areas, burner, and circulating air passageways of heater clean. Inspect these areas of heater before each use. Have heater inspected yearly by a qualified service person. Heater may need more frequent cleaning due to excessive lint from carpeting, bedding material, etc.

ODS/PILOT AND BURNER

 Use a vacuum cleaner, pressurized air, or small, soft bristled brush to clean.

CABINET

Air Passageways

- Use a vacuum cleaner or pressurized air to clean. Exterior
 - Use a soft cloth dampened with a mild soap and water mixture. Wipe the cabinet to remove dust.

Service Hints

When gas pressure is too low


- · pilot will not stay lit
- burner will have delayed ignition
- · heater will not produce specified heat
- propane gas supply may be low


When gas quality is bad

- pilot will not stay lit
- burner will produce flames and soot
- · heater will backfire when lit

You may feel your gas pressure is too low or gas quality is bad. If so, contact your local propane gas supplier.


Accessories

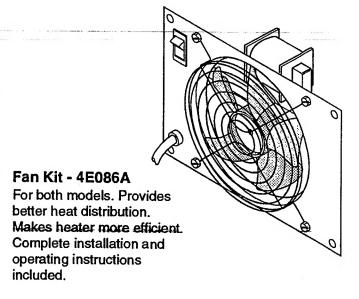



Floor Mounting Stand 4E167 - For Model 2E783D 4E168 - For Model 3E467C

For locating heater on the floor, away from a wall. Complete installation instructions included.

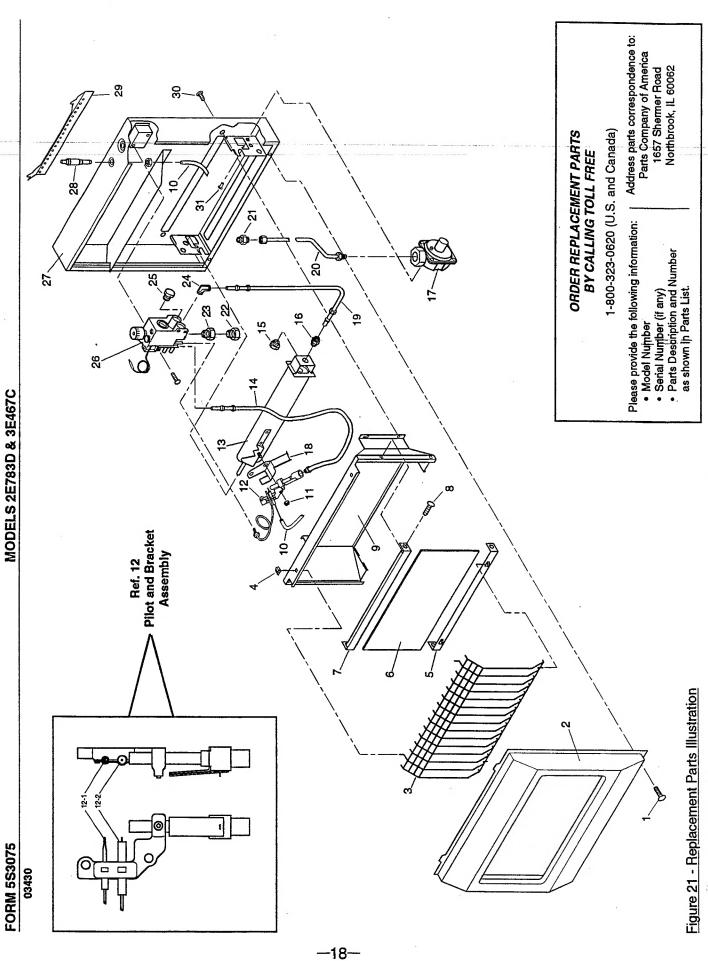

FORM 5S3075 03430

MODELS 2E783D & 3E467C

Replacement Parts List for Heater Models 2E783D & 3E467C

3F467C	αTY.	-	-	-	-	y	-	y- -	-	-	-	;	-		-	-	-	Ø	8		-	:	-	-			
2E783D		-	-	-	-	y-	-	-	-	-	-	_	!	-	1	-	-	Ø	Ø		-	-	1	-			
PART	ON	098250-01	90-298860	099553-01	098518-01	098297-03	098264-02	098276-01	098277-01	098265-01	098275-01	098522-01	098522-04	098530-01	098531-01	097159-01	099066-01	M11084-26	M11084-38		4E086A	4E167	4E168	098306-01			
	DESCRIPTION	Injector Holder	Pressure Regulator	Pilot Shield	3/8" Outlet (Burper) Tubing	3/8" Inlet Tubing	3/8" NPT Male Connector	1/8" NPT Plug	3/8" to 1/8" NPT Bushing	3/8" NPT Male Elbow	3/8" NPT Plug	Thermostat Gas Valve	Thermostat Gas Valve	Cabinet	Cabinet	Piezo Ignitor	Mounting Bracket	Screw, #10 x 3/8"	Screw, #8 x 3/8"		Fan Kit	Floor Mounting Stand	Floor Mounting Stand	Control Position Label			
REF.	NO.	16	17	18	19	50	21	22	23	24	25	56		27		28	59	30	31		Δ	۷	۷	Δ			_
3E467C	QTY.	2	1	-	1	Ļ	7	1	-	;	-	ı	-	4	:	-	_	N	-	-	-	:	-	-	1	-	
2E783D	αTY.	2	-	1	-	ł	8	-	ł	-	;	-	ŀ	4	-	1	-	8	-	-	-	-	1	-	-	1	
PART	NO.	098304-01	098742-05	098742-06	098197-01	098197-02	098342-01	098533-01BR	098533-02BR	098260-01	098260-02	098532-01AA	098532-02AA	M11084-26	098352-01BR	098352-02BR	098271-02	098249-01	098245-03	098514-01	098515-01	099120-02	099126-02	098517-01	098251-01	098251-03	
	DESCRIPTION	Screw, #10 x 3/8"	Front Panel	Front Panel	Grill Guard	Grill Guard	Clip, Grill Guard	Bottom Glass Retainer	Bottom Glass Retainer	Glass Panel	Glass Panel	Top Glass Retainer	Top Glass Retainer	Screw, #10 x 3/8"	Deflector Unit	Deflector Unit	Ignitor Cable	Nut, M5	ODS/Pilot	Thermocouple	Ignitor Electrode	Burner	Burner	3/16" Pilot Tubing	Injector	Injector	
REF.	NO.				ო		4	2		9		7		&	6		10	=	12	12-1	12-2	13		4	15		

(A) Not Shown

LIMITED WARRANTY

DAYTON ONE-YEAR LIMITED WARRANTY. Vent-free propane gas heaters, Models 2E783D and 3E467C, are warranted by Dayton Electric Mfg. Co. (Dayton) to the original user against defects in workmanship or materials under normal use for one year after date of purchase. Any part which is determined by Dayton to be defective in material or workmanship and returned to an authorized service location, as Dayton designates, shipping costs prepaid, will be, as the exclusive remedy, repaired or replaced at Dayton's option. For limited warranty claim procedures, see PROMPT DISPOSITION below. This limited warranty gives purchasers specific legal rights which vary from state to state.

LIMITATION OF LIABILITY. To the extent allowable under applicable law, Dayton's liability for consequential and incidental damages is expressly disclaimed. Dayton's liability in all events is limited to, and shall not exceed, the purchase price paid.

WARRANTY DISCLAIMER. Dayton has made a diligent effort to illustrate and describe the products in this literature accurately; however, such illustrations and descriptions are for the sole purpose of identification, and do not express or imply a warranty that the products are merchantable, or fit for a particular purpose, or that the products will necessarily conform to the illustrations or descriptions.

Except as provided below, no warranty or affirmation of fact, expressed or implied, other than as stated in "LIMITED WARRANTY" above is made or authorized by Dayton.

PRODUCT SUITABILITY. Many states and localities have codes and regulations governing sales, construction, installation, and/or use of products for certain purposes, which may vary from those in neighboring areas. While Dayton attempts to assure that its products comply with such codes, it cannot guarantee compliance, and cannot be responsible for how the product is installed or used. Before purchase and use of a product, please review the product application, and national and local codes and regulations, and be sure that the product, installation, and use will comply with them.

Certain aspects of disclaimers are not applicable to consumer products; e.g., (a) some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you; (b) also, some states do not allow limitations on how long an implied warranty lasts, consequently the above limitation may not apply to you; and (c) by law, during the period of this Limited Warranty, any implied warranties of merchantability or fitness for a particular purpose applicable to consumer products purchased by consumers, may not be excluded or otherwise disclaimed.

PROMPT DISPOSITION. Dayton will make a good faith effort for prompt correction or other adjustment with respect to any product which proves to be defective within limited warranty. For any product believed to be defective within limited warranty, first write or call dealer from whom product was purchased. Dealer will give additional directions. If unable to resolve satisfactorily, write to Dayton at address below, giving dealer's name, address, date and number of dealer's invoice, and describing the nature of the defect. Title and risk of loss pass to buyer on delivery to common carrier. If product was damaged in transit to you, file claim with carrier.

Manufactured for Dayton Electric Mfg. Co., 5959 W. Howard St., Chicago, IL 60648